No Net Loss Act
P.L. 1993, c.106 (C.13:1L14.2)

New Jersey No Net Loss Reforestation Act
P.L. 1993, c.106 (C.13:1L-14.2)

Administering Agency

New Jersey Forest Service
Mail Code: 501-04
PO Box 420
501 East State Street
Trenton, NJ 08625-0420

Telephone: (609) 292-2532
Fax: (609) 984-0378

January 2002

Revised July 2003, September 2007, and July 2012

the funds to meet the reforestation requirements and interact with local, county or other state agencies whose lands the trees will be planted on. Administrative costs incurred by the NJ Forest Service will be compensated by the state entity as agreed to in the memorandum of agreement mandated by the legislation. This option may be allowable for the entire reforestation obligation or for just part of it, depending upon the scope of the project and the suitability of tree planting success on the altered site. It is advisable that the state entity representative discusses the viability of this option with the program administrator prior to submitting the reforestation plan.

Project Narrative

The narrative section includes a description of the area that is scheduled for tree removal and a description of the proposed reforestation project/s. The intent of the law is to mitigate as much of the deforestation on or as close as possible to the project site. All state entities should roj(t)7(t)-2(he)

Reforestation using seedlings or whip/container should only be proposed if the existing site is a seedling forest or an emerging forest, respectively, or the site slope or access would prevent the use of 2-2.5" caliper trees.

3. The amount of land in acres to be reforested or developed by the state entity, if applicable. A des.d <</c82(ount)-tal A d(i)nm/TT022(th)2(e)632d [(unt)-ud

References

Hortus Third (Cornell University Press) is to be reference for plant names (Latin and common).

American Association for Nurseryman (AAN) Standards for Nursery Stock (American Association of Nurserymen, publisher) is to be the reference for plant quality.

Trees for New Jersey Streets (New Jersey Shade Tree Federation, publisher) is to be the reference for reforestation tree selection on county or municipal streets or highways.

The most recent editions of the references shall be used.

The Pinelands Commission [illegible]

Reforestation Landscape Drawings

A scaled landscape drawing or blueprint of the proposed reforestation is required. If the proposed plant material is container grown or balled and burlapped materia

Reforestation Protection and Care Methods

Reforestation protection and care methods shall be included in the plan to insure the long term survivability of the trees. These shall include a narrative describing the methods to be utilized in caring for the trees during the establishment time period and a maintenance schedule. This schedule should include items such as watering, mulching, weed control, stake removal or insect and disease control. A sample tree maintenance schedule can be seen in the appendix of these guidelines.

The minimum survival rates, inspection time frames and replacement schedule of unhealthy trees text shown below must be incorporated into the reforestation protection and care section of the plan.

The Forest Service and a representative of the state entity shall inspect the reforestation

Emerging Forest

Any half-acre area that is predominately young trees having a dbh of 4" or less should be sampled. The sample area must be representative of the total area. The half-acre area shall be considered existing forested area if the density of the young trees would be 230 trees per half-acre or greater. This would mean any 1/10th acre sample plot with 46 or more live trees in it shall be considered existing forested area. The square foot area of young tree coverage as determined using on-site measurement shall constitute the area used to determine reforestation quantities.

Established Forest

Any half-acre area that is predominately trees with a dbh greater than 4" shall be termed an established forest. Any established forest ½ acre plot that has 33% canopy cover or greater shall be considered existing forested area and counted for reforestation. Any plot that has canopy cover less than 33% is not defined as a forested area and is not included for reforestation purposes. Any trees removed from plots that do not meet the minimum canopy coverage do not have to be replaced.

Each standard ½ acre plot that falls within the limits of the project is evaluated for canopy coverage regardless of ownership boundary lines that may bisect the plot. If the plot is

No Net Loss Act
P.L. 1993, c.106 (C.13:1L14.2)

wr

Conifer and Ornamental Tree Substitution Size List

Screening Conifers

Botanical Name	Common Name	Size
Cupressocyparis leylandii	Leyland Cypress	8’-10’
Juniperus sp.	Junipers Upright Varieties	7’-8’
Pinus strobus	Eastern White Pine	7’-8’
Pinus thunbergiana	Japanese Black Pine	7’-8’
Psuedotsuga menziesii	Douglas Fir	7’-8’
Picea abies	Norway Spruce	7’-8’
Picea pungens	Colorado Spruce	7’-8’
Thuja occidentalis	Arborvitae	8’-10’
Tsuga canadensis	Eastern Hemlock	7’-8’

Specimen Conifers and Broadleaf Evergreens

Botanical Name	Common Name	Size
Abies concolor	White Fir	7’-8’
Cedrus atlantica glauca	Blue Atlas Cedar	8’-10’
Cedrus deodora	Deodora Cedar	8’-10’
Cedrus libani	Cedar of Lebanon	8’-10’
Cryptomeria japonica	Japanese Cryptomeria	8’-10’
Ilex sp.	Holly Species	6’-7’
Larix sp.	Larch Species	8’-10’
Metasequoia glyptostroboides	Dawn Redwood	8’-10’
Taxodium distichum	Bald Cypress	8’-10’

Ornamental Trees-Low Branched or Single Stem

Botanical Name	Common Name	Size
Cornus florida	Flowering Dogwood	7’-8’
Cornus kousa	Kousa Dogwood	7’-8’
Cornus mas	Conelian Cherry	7’-8’

Conifer and Ornamental Tree Substitution Size List

Multi-Stem Ornamentals

Botanical Name	Common Name	Size
Amelanchier sp.	Multi-Stem Serviceberry	7’-8’
Betula sp.	Clump Birch	10’-12’
Cercis canadensis	Clump Redbud	8’-10’
Chionanthus virginicus	Multi-Stem Fringetree	6’-7’
Magnolia sp.	Magnolias	7’-8’
Viburnum sp.	Viburnums-selected species	6’-8’
V. dentatum	Arrowwood Viburnum	
V. lantana	Wayfaring Tree	
V. lentago	Nannyberry	
V. prunifolium	Blackhaw Viburnum	
V. sieboldii	Sibold Viburnum	

Note: This list may be used to equate multi-stem trees, broadleaf evergreens and conifers to the 2”-2.5” caliper size shade trees required in reforestation plans for the No Net Loss Reforestation

Reforestation Plan Approval Process
No Net Loss Act

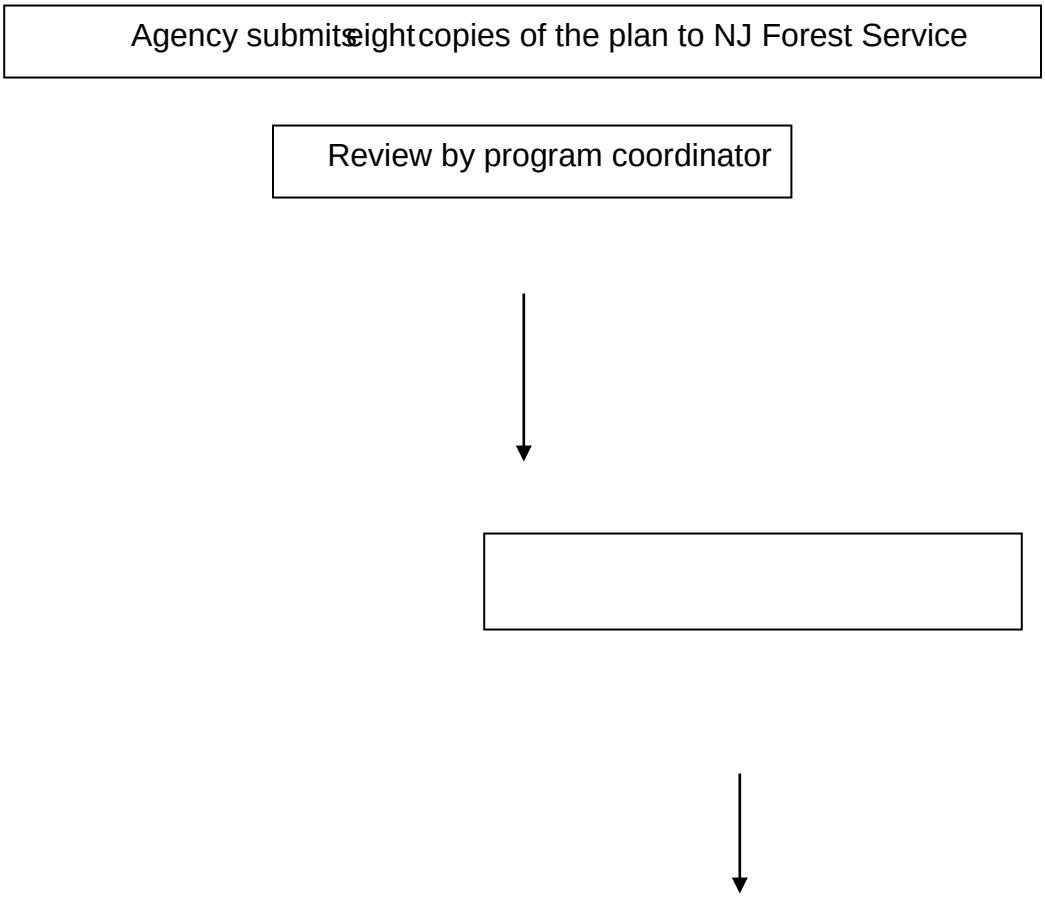

No Net Loss Act
P.L. 1993, c.106 (C.13:1L-14.2)

General Information Form

No-Net Loss Reforestation Program

Agency or Department Name: _____

Contact Person: _____

Title: _____

Mailing Address: _____

_____

Telephone Number: _____Fax:_____

E-Mail Address: _____

Project Name:_____

Estimated Project Start Date: _____ Estimated Project Duration: _____

Project Location: _____(municipality/municipalities)

No Net Loss Act
P.L. 1993, c.106 (C.13:1L14.2)

Off-Site Reforestation Form

No-Net Loss Reforestation Program

Off-

Reforestation Monetary Compensation

No-Net Loss Reforestation Program

State Entity_____
Project Name_____

Total Forested Acreage Removed_____

Proposed Acreage Reforested On-Site_____

Proposed Acreage Reforested Off-Site_____

Proposed Acreage not Reforested

Established Forest_____

Emerging Forest_____

Seedling Forest_____

State Entity Financial Officer _____

Title _____

Mailing Address _____

_____

Telephone Number _____Fax _____

Criteria for Exemptions

No-Net Loss Reforestation Program

Standard Forestry Practices

The following activities are exempted from the no-net loss legislation as per N.J.S.A. 13:1L-

No Net Loss Act
P.L. 1993, c.106 (C.13:1B-14.2)

•

No Net Loss Act
P.L. 1993, c.106 (C.13:1B-14.2)

Product Type: The way a tree purchased for reforestation is sold or packaged. Examples are seedling, balled and burlapped, bare root whips and container grown.

Reforestation: The reestablishment of trees into an area by direct seeding or planting.

Seedling: An immature tree that is 24” or less in height.

Seedling Forest: Any half-

Appendix

SAMPLE TREE PLANTING SPECIFICATIONS
for the
No Net Loss Reforestation Program

1. GENERAL

The contractor shall be liable for any damages to property caused by his operations and in the event of damages, he shall at his own expense restore all disturbed or damaged areas to their original condition. All materials, equipment and personnel shall be limited to the work area defined by the project supervisor.

Trees shall be free of damage as the result of handling or transportation.

No substitution of plant material is allowed unless written permission is obtained from the project supervisor prior to the delivery date of the material.

All work shall conform to accepted horticultural practices as ultimately determined by the project supervisor.

2. SCOPE OF WORK

Work shall consist of:

- preparation of areas for planting
- furnishing and planting of specified trees, unless the contract is for planting only
- maintenance of plantings until acceptance by the project supervisor
- clean up and restoration of any disturbed areas to the condition prior to the contractor's operations

3. SCHEDULING OF WORK

The contractor shall submit a proposed work schedule to the project supervisor for approval at least seven (7) days prior to beginning operations. After the schedule is accepted, no modifications will be permitted without written authorization from the project supervisor.

The contractor shall arrange to confine his operations to normal working hours for the industry and no work will be permitted on Sundays or holidays without written authorization from the project supervisor.

4. PERSONNEL

All personnel will be properly supervised in a manner that assures that the property is protected from damage that the safety of all personnel and the public is protected and that all contract work is done in a professional manner and according to accepted horticultural standards.

5. PROTECTION OF UTILITIES

Prior to any excavation or the driving of stakes into the ground, the contractor shall ascertain and have marked out the location of all underground utilities. The contractor shall take proper precautions not to disturb or damage any subsurface utilities.

In the event that any subsurface utilities are uncovered or damaged, the contractor shall immediately notify the project supervisor so that the contract work may be relocated or stopped until the damage can be repaired. The contractor shall be financially responsible for any damage to utilities and structures and shall properly maintain the protection of same.

6. MULCH

Mulch shall be uniformly shredded hard wood. All foreign material including twigs, stones, cans, soil, etc. shall be removed prior to spreading.

7. LAYOUT

All trees and shrubs shall be located as shown on the plans supplied by the project supervisor. Should the contractor encounter obstructions of any nature, he shall notify the project supervisor who will arrange adjustments. All adjustments to the plan must be authorized in writing.

The project supervisor or his designee shall stake the exact planting location of each tree in accordance with the plans. The staking and layout work shall be done sufficiently in advance of planting to avoid delays to the contractor.

No planting holes shall be excavated in advance of planting operations. The planting holes must be approved by the project supervisor prior to the start of the planting operation. Each plant shall be planted in an individual hole as specified. All plants shall be set to ultimate finished grade so that they will bear the same relationship to finished grade as they bore to the natural grade before transplanting. See the accompanying planting diagram for details.

No Net Loss Act
N.J.S.A. 13:1Ł14.1 et seq.

8. WATER

16. MULCHING

Shredded hardwood mulch supplied by the contractor shall be free of debris and shall be placed by the contractor around all plantings at the time of planting to a depth of three (3") inches as shown in the planting diagram. Care shall be exercised to keep mulch two (2") inches away from the bases of all plantings. After the mulching operation has been approved by the project supervisor, the mulch shall be thoroughly watered.

17. PRUNING

The contractor shall not prune any plant.

18. CLEAN-UP

During the course of operations, the Contractor shall remove from the property at his expense all excess and waste materials.
Any damaged lawn areas or planting areas will be restored to their original condition by the contractor at his expense, if such damage is the result of the contractor's operations.

19. INSPECTION FOR ACCEPTANCE

Inspection: The contractor shall notify the project supervisor when planting is completed and shall request an inspection in order to determine whether or not the project meets the specifications contained herein. If the work is acceptable, a written notice shall be provided stating so. If deficiencies are found in the work, a list of items requiring attention shall be furnished to the contractor by the project supervisor. The contractor shall correct the deficiencies within ten (10) days and another inspection shall be made. This procedure will continue until the work is found acceptable.

Acceptance: After inspection, the contractor will be notified in writing by the project supervisor of the acceptance of all work.

No Net Loss Act
N.J.S.A. 13:1Ł14.1 et seq.

MULCHING

Shredded hardwood mulch shall be the preferred type of mulch but other organic mulches may be used if approved by the project manager. The mulch supplied by the contractor shall be free of debris and shall be maintained by the contractor around all plantings to a depth of three (3") inches as shown in the planting diagram for the entire maintenance period. Care shall be exercised to keep mulch two (2") inches away from the base of all plantings. The mulch ring shall be maintained at a size of 36" in diameter.

3. MAINTENANCE SCHEDULE

The contractor shall arrange to confine his operations to normal working hours for the industry and no work will be permitted on Sundays or holidays without written authorization from the project supervisor.

4. PERSONNEL

Memorandum of Agreement

Concerning Reimbursement of the New Jersey Department of Environmental Protection, Division of Parks and Forestry for Its Review and/or Implementation of Reforestation Plans Under the No Net Loss Reforestation Act, N.J.S.A. 13:1D-14.1 et seq.

This Memorandum of Agreement (MOA) is between the New Jersey Department of Environmental Protection (NJDEP), Division of Parks and Forestry (NJP&F) and the NJ STATE ENTITY () in accordance with the requirements of the New Jersey No Net Loss Reforestation Act, N.J.S.A. 13:1D-14.1 et seq.

TERMS OF THIS AGREEMENT

1. STATE ENTITY shall submit a reforestation plan as required by the No Net Loss Reforestation Act, N.J.S.A. 13:1D-14.1 et seq., to NJDEP-NJP&F for each deforestation project subject to the Act, in accordance with the provisions set forth in N.J.S.A.13:1D-14.2(a) & (b).

2. NJP&F will complete reviews and/or implementations of a STATE ENTITY reforestation plan in accordance with the provisions set forth in N.J.S.A.13:1D-14.2.

3. NJP&F agrees to make its staff available to participate in early project planning in order to enhance consideration of reforestation in the early stages of the project development process and to facilitate and maintain project schedules.

4. NJDEP-NJP&F will notify the STATE ENTITY, within thirty (30) days of receipt of a STATE ENTITY reforestation plan, of any deficiencies in such plan.

5.

REIMBURSEMENT:

STATE ENTITY agrees to reimburse the NJDEP&F for the actual labor hours that the NJDEP&F expends